

The FG Wilson sound attenuated enclosures for the range of SCANIA powered generating sets are a result of continuing research and development by our specialist acoustic engineers. **These enclosures reduce sound levels to comply with the new European Community regulations 2000/14/EC which became effective on 1 January 2002.**

The fully weatherproof enclosures incorporate internally mounted exhaust silencers and are of extremely rugged construction in order to withstand the rough handling common on many construction sites. They are designed on modular principles with many interchangeable components permitting on-site repair.

Robust/Highly Corrosion Resistant Construction

- ▶ Black finish stainless steel locks and hinges
- ▶ Zinc plated or stainless steel fasteners
- ▶ Body made from steel components treated with polyester powder coating

Excellent Access for Maintenance

- ▶ Two large doors on each side
- ▶ Radiator fill access plate
- ▶ Lube oil and cooling water drains piped to exterior of the enclosure

Security and Safety

- ▶ Control panel viewing window in a lockable access door
- ▶ Emergency stop push button (red) mounted on enclosure exterior
- ▶ Cooling fan and battery charging alternator fully guarded
- ▶ Fuel fill and battery can only be reached via lockable access doors
- ▶ Exhaust silencing system totally enclosed for operator safety

Transportability

- ▶ Tested and certified single point lifting facility
- ▶ Lifting points on baseframe

Optional Features

- ▶ Oil field type skid with dragging points and fork lift truck pockets



SCANIA 12L



Modular Acoustic Enclosure




Níveis de atenuação sonora (dBA) 3 Fases

50 Hz

Modelo do Grupo Gerador	15 m		7 m		1 m	
	Carga de 75%	Carga de 100%	Carga de 75%	Carga de 100%	Carga de 75%	Carga de 100%
S350P1	64,6	75,8	70,6	71,8	82,7	83,3
S440E1	64,6	75,8	70,6	71,8	82,7	83,3

60 Hz

Modelo do Grupo Gerador	15 m		7 m		1 m	
	Carga de 75%	Carga de 100%	Carga de 75%	Carga de 100%	Carga de 75%	Carga de 100%
S350P1	64,6	75,8	70,6	71,8	82,7	83,3
S440E1	64,6	75,8	70,6	71,8	82,7	83,3

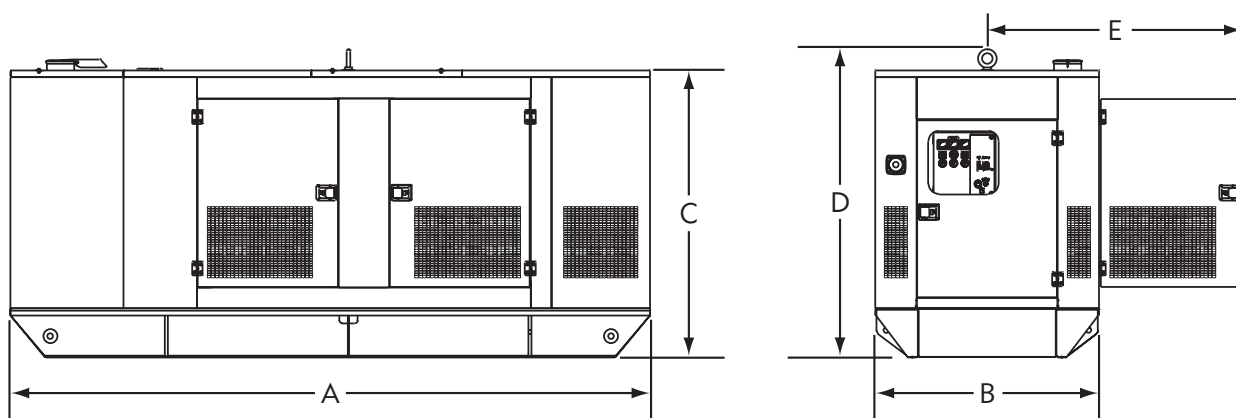

Dimensões e Pesos – Enclausura Silenciado

Modelo do Grupo Gerador	A: mm	B: mm	C: mm	D: mm	E: mm	Peso* kgs
S350P1	4560	1600	2050	2156	1010	4260
S440E1	4560	1600	2050	2156	1010	4260

*Incluem-se óleo e refrigerante

